


DATA SHEET

COMPOSITE INSULATED PANELS



PRH 25253

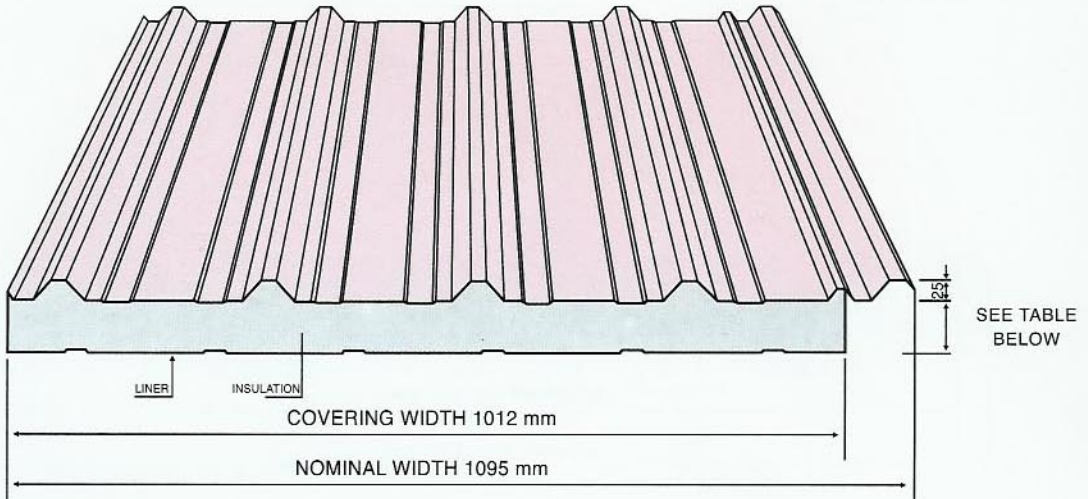

Composite panels are produced using rigid polyurethane with external and internal sheets in steel or aluminium of varying thickness, coatings and colours.

PU

Average Density : 35 Kg/M³

Thickness : 25 - 100 MM

“U” Value

PU Thickness	W/M ² °C
--------------	---------------------

25 MM	0.76
-------	------

35 MM	0.54
-------	------

50 MM	0.38
-------	------

* See data sheet for single skin.

* Contact Profiles for information regarding coatings and colours.